

Date: January 4, 2018

To: Prospective Bidders

Project: Columbus Metropolitan Library Technology Cabling Phase 4 CML 17-027

RE: Information Letter #1


This Information Letter shall become a part of the Bid Documents for this project and shall be integrated into the final Contract Documents to complete the Work.

BID QUESTIONS

1. Question: Drawing T301 detail D has does not have a schedule for all of coded notes.

Answer: The following notes should have been included; (see sketch below)

- 1. 18" LADDER RACK.*
- 2. 2-POST EQUIPMENT RACK.*
- 3. N/A*
- 4. 6" WIDE VERTICAL CABLE MANAGEMENT.*
- 5. 8" WIDE VERTICAL CABLE MANAGEMENT.*
- 6. N/A*
- 7. 2U 48 PORT CAT-6 PATCH PANEL.*
- 8. 2U 48 PORT CAT-6A PATCH PANEL.*
- 9. 2U Horizontal Cable Manager*
- 10. SURFACE-MOUNTED ELECTRICAL RECEPTACLE AND CONDUIT SHALL BE CLAMPED TO SIDE OF LADDER RACK.*
- 11. NETWORK ELECTRONICS BY OWNER.*

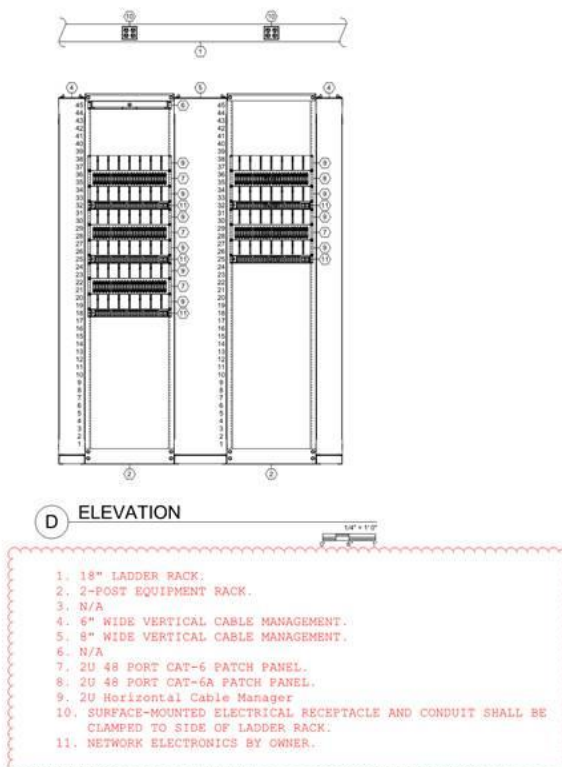

2. Question: Drawing T201 shows to AV subscript P symbols in room s005 and 0003. What cabling is required at these symbols? No faceplate detail is shown on T401.
Answer: The AV contractor (Live Technologies) is responsible for the AV connections.
3. Question: Drawings T201 shows an AV subscript L symbol in room 005. Where does the cabling from this plate go to? If to the projector is an additional AV(L) required in room 003 for that projector?
Answer: The AV contractor (Live Technologies) is responsible for the AV connections.
4. Question: There are no AV subscript H plates shown on the floor plans but shown on T401. Are these to be used anywhere?
Answer: The AV contractor (Live Technologies) is responsible for the AV connections.
5. Question: Drawings T202 shows an AV symbol in room 126. What is required at this plate?
Answer: Disregard/not applicable
6. Question: Drawing T402 Detail G shows a fiber/copper backbone from the MTR to the TR both on the first floor. There is only (1) TR on the project on the 3rd floor. Is this fiber/copper cabling required? If so where is the MTR located?
Answer: We have NO fiber backbone and the detail will be removed in the addendum.
7. Question: Drawings T301 detail A has a note 7 pointing at the tray. This note is for an access panel. Is this supposed to be cable tray? If so what type of tray ladder or basket and who is to provide the cabling contractor or electrician?
Answer: It is for ladder rack. Number is incorrect. Ladder Rack is listed in section 27 10 00 2.04
8. Question: T301 Detail A shows (3) racks but detail D shows (2) racks. Which is correct and how many are to be provided?
Answer: A third empty 4 post equipment rack (as listed in section 27 10 00) should be provided for the paging system contractor.

DRAWINGS

1. T201 dated 1/4/2018
2. T202 dated 1/4/2018
3. T301 dated 1/4/2018
4. T401 dated 1/4/2018
5. T402 dated 1/4/2018

ATTACHMENTS:

NBBJ Tech Addendum 01

END OF INFORMATION LETTER NO. 1